


System No. C-BJ-3027

T Rating - 0 Hr

F Rating - 2 Hr

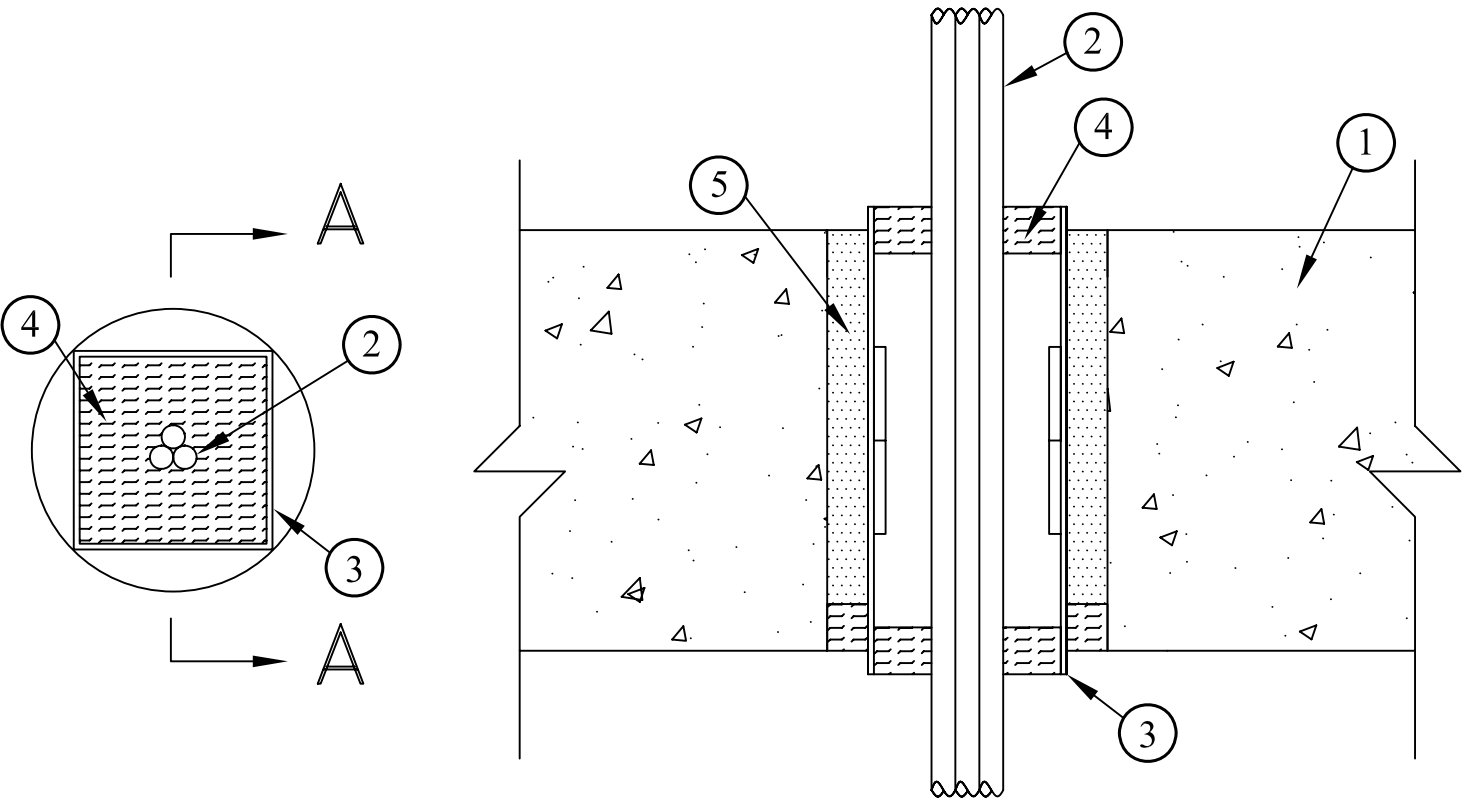

SECTION A-A

- 1. CONCRETE FLOOR ASSEMBLY
- 2. THROUGH PENETRANT/CABLES
- 3. ABESCO CT 120 TRANSIT
- 4. PACKING MATERIAL 10.3 PCF MINERAL WOOL BATTING INSULATION
- 5. ABESCO FR MORTAR