


System No. W-L-3293

T Ratings - 0 Hr

F Rating - Up to 2 Hr

L Rating at ambient - Less than 1, 7 and 8 CFM / sq ft

L Rating at 400 F - Less than 1 and 6 CFM / sq ft

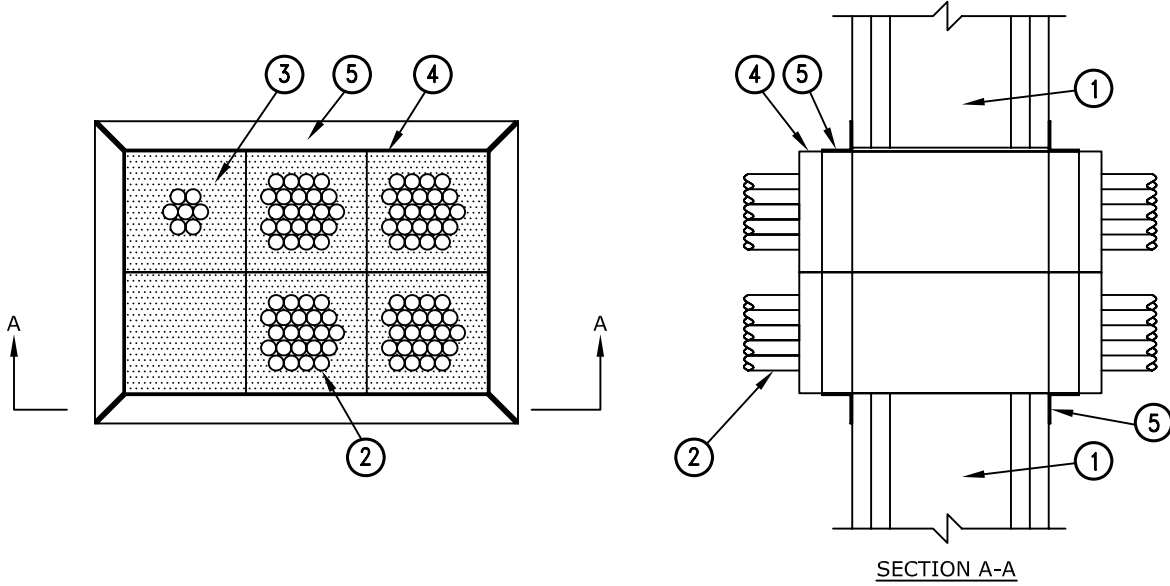

1. WALL ASSEMBLY
2. CABLES
3. ABESCO CP310 FR ACRYLIC INTUMESCENT CAULK OR ABESCO FR PUTTY
4. ABESCO CT120 CABLE TRANSIT
5. MOUNTING FLANGE